

# TBC-7

## EXTENDED PERFORMANCE TIME BASE CORRECTOR

### General

The TBC-7 Extended Performance Time Base Corrector provides significant enhancements in the quality and functionality of any Ampex Type C studio VTR.

The Emmy-award winning Zeus™ Advanced Video Processor from Ampex first eliminated picture bounce and periodic defocusing effects associated with the time compression/expansion, slow-motion editing and variable speed playback functions of conventional TBCs. Now, Ampex has successfully brought that capability to a simpler, more affordable time base corrector, the TBC-7.

The key to the TBC-7's superb non-real time performance is an adaptive digital comb filter decoder that preserves high frequency picture detail, while line-by-line digital interpolation of both luminance and chrominance eliminates picture bounce and defocusing effects.

Velocity error correction capabilities significantly exceed those of "2nd order" implementations. This is achieved by comparing symmetrical information, before and

after the line to be corrected, resulting in the virtual elimination of velocity errors. The TBC-7's digital implementation eliminates drift and associated adjustment, yielding consistently superior performance and operation.

Another invaluable TBC-7 feature — also inherited from the Zeus advanced video processor — is the Decode mode. This feature corrects off-tape ScH inversions of non-color-framed edits, thus eliminating non-color framed edit picture shifts.

The TBC-7's standard time-share and heterodyne processing capabilities allow it to meet the needs of a wide variety of interformat operational environments.

Historically, Ampex has protected its customers' investments by offering upgrades and enhancements that expand and extend the useful life of its products. In line with that policy, the superior performance and transparent operation of the TBC-7 will support any Ampex Type C studio VTR, including the thousands of VPR-2s and VPR-2Bs in use worldwide, every day.


### Features and Benefits

- ☐ No-bounce, no-blur, time compression/expansion and variable speed playback from -1 to +3 times play speed.
- ☐ Digital velocity compensation, drift- and adjustment-free
- ☐ Digital dropout compensation
- ☐ Decode mode allows replay of non-color-framed edits with no picture shift
- ☐ Edit Ready function insures consistent picture positioning
- ☐ 4Fsc, 8-bit sampling
- ☐ 28-line correction window
- ☐ Recognizable picture in shuttle to 50 times play speed
- ☐ Dual, time-share, video inputs
- ☐ One- or two-wire heterodyne operation
- ☐ ScH phased design
- ☐ Full complement of video processor controls
- ☐ Available full-function remote control panels
- ☐ Compatibility with any Ampex Type C studio VTR





## Time-share Function Block Diagram

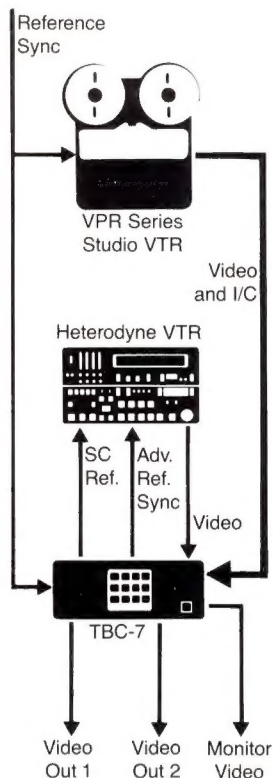

## TBC-7 Specifications

	NTSC (525/60)	PAL (625/50)
<b>GENERAL</b>		
Digital Sampling Frequency:	4Fsc (14.3 MHz)	4Fsc (17.7 MHz)
Quantizing Levels:	256 (8 bits)	
Size:	19.7" (500 mm) W x 5.25" (133 mm) H x 21.6" (549 mm) D (May be mounted in 19" (483 mm) rack)	
Weight:	45 lbs (20.5 kg.)	
Power Requirements:	<240 watts 90-140 VAC or 190-250 VAC, 50 to 60 Hz	
Operating Environment:		
Temperature	0° to 45° C (32° to 113° F)	
Humidity	10 to 90% RH (non-condensing)	

### VIDEO SIGNAL PERFORMANCE

Bandwidth:	Flat to 4.2 MHz (±.2 dB)	Flat to 5.5 MHz (±.2 dB)
Signal-to-Noise Ratio <sup>2</sup> :	Better than 56 dB	Better than 56 dB
Differential Gain <sup>3</sup> :	≤2%	≤3%
Differential Phase <sup>3</sup> :	≤2%	≤3%
Transient Response (2T Pulse)	≤1% K Factor	≤1% K Factor

### TIME BASE PERFORMANCE

Correction Range (Window):	28 television lines	
Digital Memory Size:	32 television lines	
Output Jitter <sup>4</sup> :	≤ ± 2.5 nsec (color) ≤ ± 10 nsec (mono.)	≤ ± 3 nsec (color) ≤ ± 20 nsec (monochrome)
Slow Motion Range:	-1 to +3 times play speed (VTR model dependent)	
Shuttle Range:	Up to 50 times play speed (VTR model dependent)	

### INPUT SIGNALS<sup>1</sup>

Tape Input Video (A & B):	1V, p-p, ± 2 dB Composite Video
Reference Video:	1V, p-p, ± 2 dB Composite Video (loop through)
Dropout R.F.	1 to 2V p-p R.F. from VTR or TTL Dropout Pulse (low for dropout)

### OUTPUT SIGNALS<sup>1</sup>

Video Output (1):	1V, p-p Composite Video
(2):	1V, p-p Composite, or Non-Composite Video
Monitor Video Output:	1V, p-p Composite Video
VTR Advanced Reference:	Standard level Black-Burst signal or 4V, p-p Composite Sync or Vertical Drive
Sync-Coherent S.C.:	1V, p-p S.C. sinewave

AmpeX reserves the right to improve products and change specifications without notice.

Note 1: Video levels presume 75 ohm termination.

Note 2: System signal-to-noise is determined from the degradation to input signal-to-noise ratio. That is, 47 dB VTR S/N = 46.5 at TBC output. This reflects a TBC-7 signal-to-noise ratio of 56 dB.

Note 3: Measured using a non-synchronous subcarrier modulated ramp with subcarrier amplitude equal to that of burst.

Note 4: Residual output error is directly dependent on the S/N of the input signal. Specification based on an input S/N of 47 dB.

FOR INFORMATION ON AMPEX BROADCAST VIDEO PRODUCTS CONTACT THE VIDEO SALES MANAGER NEAREST YOU.

CALIFORNIA  
(415) 367-2202  
Redwood City  
(818) 365-8627  
San Fernando  
GEORGIA  
(404) 491-7112  
Atlanta  
ILLINOIS  
(312) 593-6000  
Arlington Heights

MARYLAND  
(301) 530-8800  
Bethesda  
NEW JERSEY  
(201) 825-9600  
Allendale  
(212) 947-8633  
New York  
TEXAS  
(214) 960-1162  
Carrollton

UTAH  
(801) 487-8181  
Salt Lake City  
WASHINGTON  
(206) 251-8682  
Kent

AUSTRALIA  
(008) 023124  
North Ryde, NSW

BELGIUM  
067/214921  
Nivelles

BRAZIL  
(021) 541-4137  
Rio de Janeiro  
CANADA  
(416) 821-8840  
Mississauga, Ont.  
COLOMBIA  
236-4659  
Bogota

FRANCE  
(01) 4270-5500  
Paris  
W. GERMANY  
(069) 60580  
Frankfurt (Main)  
HONG KONG  
3-678051  
Kowloon  
ITALY  
(06) 55461  
Rome

JAPAN  
(03) 767-4521/2/3  
Tokyo  
MEXICO  
554-9255  
Mexico, D.F.  
NETHERLANDS  
030-612921  
Utrecht  
SPAIN  
(91) 241-0919  
Madrid

SWEDEN  
08/28 29 10  
Sundbyberg  
SWITZERLAND  
(037) 21.86.86  
Fribourg  
UNITED KINGDOM  
(0734) 875200  
Reading, Berks.  
VENEZUELA  
782-3255  
Caracas

# AMPEX

AmpeX Corporation  
Audio-Video Systems Division

© 1987 AmpeX Corporation

Litho in U.S.A. — 9/87 — V-1130